




U9000

MULTI-FUNCTION DATA TERMINAL

5.0-inch HD screen · Quad -core

4G full Netcom

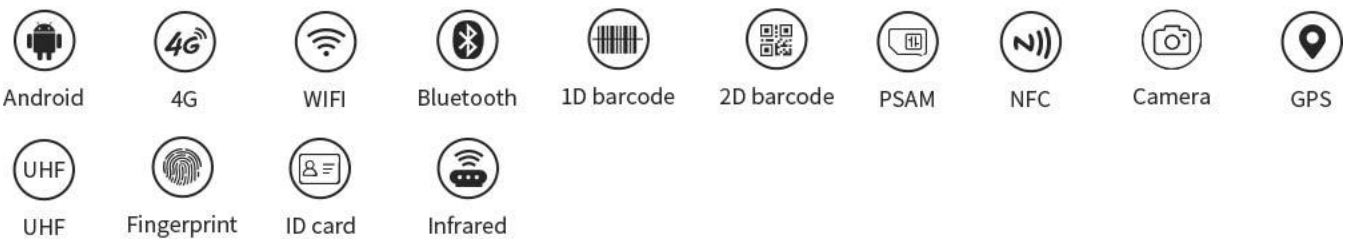

Product parameters

Performance

Quad core	
CPU	Cortex-A53 Quad-core 64-bit 2.0GHz high-performance processor
RAM+ROM	2GB+16GB Supports up to 3GB+32GB
Expand memory	Micro SD(TF) Supports up to 128GB
System	Android 8.1/Android 9.0

Data communication

WLAN	Dual-band 2.4GHz / 5GHz, Supporting IEEE 802 a/b/g/n/ac protocol
WWAN	2G: GSM (850/900/1800/1900MHz)
	3G: WCDMA (850/900/1900/2100MHz)
	4G: FDD:B1/B3/B4/B7/B8/B12/B20 TDD:B38/B39/B40/B41
Bluetooth	Support Bluetooth 5.0 Transmission distance 5-10 meters
GNSS	Support GPS, Galileo, Glonass, Beidou

Physical parameter

Dimensions	178mm×78mm×24mm
Weight	<500g
Display	5.0 inch IPS color display with resolution 720*1280
TP	Corning Gorilla glass, supports multi-touch
Battery capacity	Rechargeable polymer battery (3.7V 4800mAh) removable
	Standby time >350 hours
	Working time > 12 hours
	Charging time <4H, using standard power adapter and data cable
Expansion Card slot	PSAM x 2, Micro SIM card x 1, TF card x 1, POGO Pin x 1
Communication interface	Type-C USB x 1, OTG
Audio	Speaker (mono), Microphone, Receiver
Keypad	13 soft silicone buttons
Sensor	Gravity sensor, Vibration motor

Language/input method

Input	English, Pinyin, Five strokes, Handwriting input, Support soft keypad
Language	Language packs in Simplified Chinese, Traditional Chinese, English, Korean, Japanese, Malaysian, etc.

Data collection

Barcode scanning	
1D Scanning engine	Mindeo 966 Honeywell N4313
1D Symbolologies	Code128,EAN-13,EAN-8,Code39,UPC-A,UPC-E, Codabar,Interleaved 2 of 5,China post 25,ISBN/ISSN, Code93,UCC/EAN-128, GS1 Databar,HIBC, etc.

2D Scanning engine	E483 Honeywell N5703 N6603
2D Symbolologies	PDF417, Micro PDF417, GS1 Composite, Aztec Code, Data Matrix, QR Code, Micro QR Code, MaxiCode, Hanxin Code, etc.

Camera (Optional)

Rear camera	8MP HD camera, Support auto focus, Flash, Anti-shake, Macro shooting
-------------	--

Extended function

Infrared (Optional)	
Wavelength	940nm
Frequency	38kHz
Distance	>4m
Protocol	DLT_645-2007, DLT_645-1997

Fingerprint recognition (Optional)

Frequency	Configure TCS semiconductor sensor with live identification technology
Collection area	11.3×12.4mm
Resolution	508 dpi, 8-bit grayscale
Extraction format	ISO 19794, WSQ, ANSI 378, JPEG2000
Secure encryption	AES, DES key encryption for host communication channel

ID card identification (Optional)

Radio frequency technology	Comply with ISO/IEC 14443 type B standard, and "GA 450-2003 desktop resident ID card reader general technical requirements", "1GA450-2003 desktop resident ID card reader general technical requirements first revised but (draft)"
Security module	ID verification system dedicated module
Distance	0~5cm
Reading use	<1.55
Frequency	13.5MHz±7kHz

NFC (optional)

Frequency	13.56MHz
Protocol	Support ISO14443A/B, 15693 agreement
Distance	2cm-5cm

UHF (optional)

Frequency	840-960MHz
Protocol	EPCglobal UHF Class1 Gen2 / ISO 18000-6C
Distance	>1.5m

LF (optional)

Frequency	125K/134.2K; ISO11784/ISO11785/FDX-B frequency
-----------	---

User environment

Operating temperature	-20℃ - 55℃
Storage temperature	-40℃ - 70℃
Environment humidity	5%RH--95%RH(no condensation)
Drop specification	6 sides Supports 1.5 meters drops on the marble within the operating temperature
Rolling test	0.5m rolling for 6 sides, can still work steadily
Protection level	IP66

Accessories

Standard	Adapter, Data cable, Protective film, Instruction manual
----------	--